


DESANDER

TECHNICAL INFORMATION

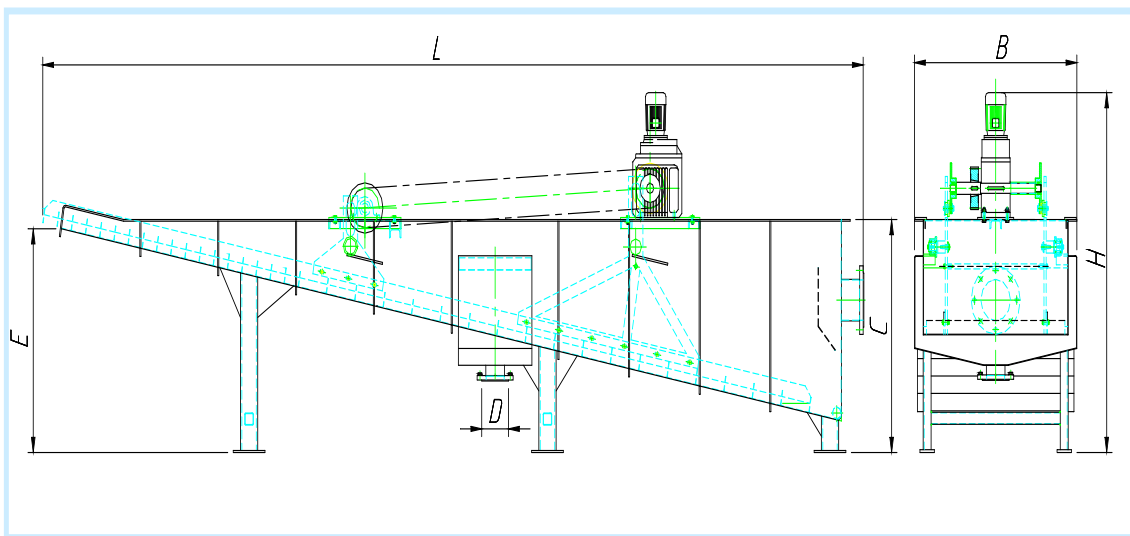

MODEL	Q m3h	P. Inst. Kw	L mm	B mm	C mm	E mm	H mm	D DN
RT 2	30	0.25	4300	950	1000	950	1635	150
RT 4	33	0.37	5400	1150	1150	1000	1805	200
RT 6	53	0.5	7000	1400	1400	1300	2060	250

The principle for operation is based on rapid decanting of the heavy particles, which are deposited at the bottom and mechanically extracted by the rake outside the device.

