

# ***ISOFLOAT***


## ***GENERAL TECHNICAL INFORMATION***

	Diameter	Height	Flows	Pow. collector	Pow. cart	Pow.conveyor
From	1600mm	1875mm	12m <sup>3</sup>	0.25Kw	0.25Kw	0.25Kw
To	17925mm	3120mm	1875m <sup>3</sup>	3Kw	3Kw	3Kw

### ***APPLICATIONS:***

#### **PRE-TREATMENT: IF-IFOC**

Tecexsa's circular DAF, manufactured both in civil work and in steel, is the ideal equipment to eliminate suspended solids, oils and fats. It is used both in primary and in tertiary treatment, thanks to its versatility and efficiency.

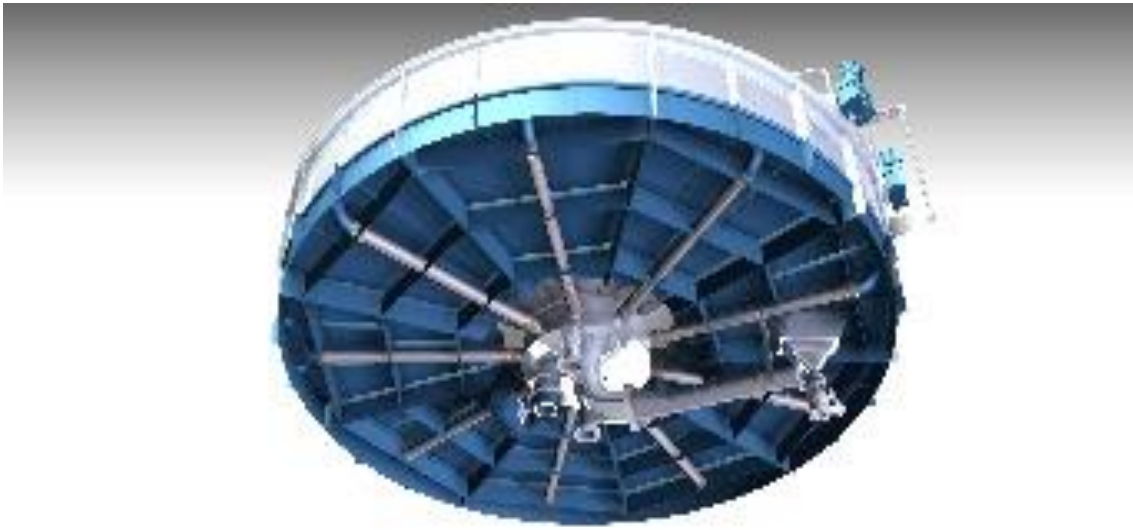

## IFB-IFOCB BIOLOGICAL TREATMENT

This is our flotation system to clarify effluents from biological treatments. Especially recommended for the food and paper industry or beverage manufacturers.



## **THICKENING: IFE-IFOCE**

This is ideal equipment for sludge thickening, where we apply the greatest retention time to obtain float sludge with a higher consistency and lower moisture level.

